


Instructions for Use

Connection set

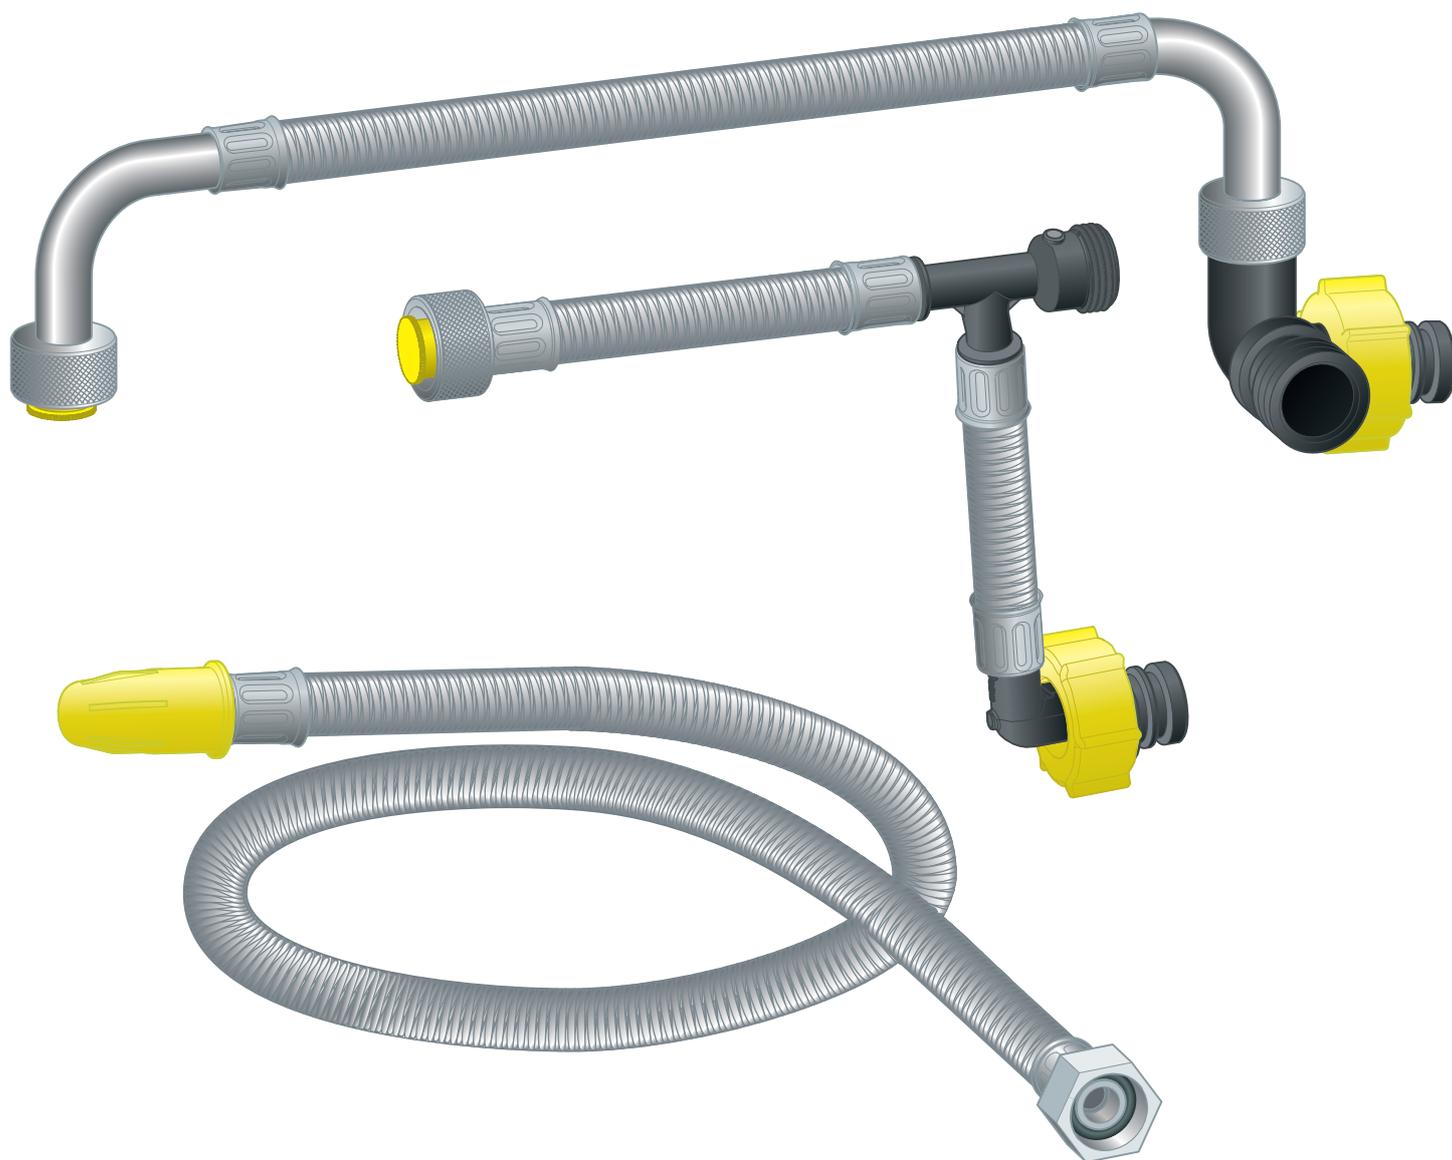

for wall-hung shower WCs, concealed cistern 3H, concealed cistern 3L

Model
8570.70

Year built (from)
04/2023

viega

Table of contents

1	About these instructions for use	3
	1.1 Target groups	3
	1.2 Labelling of notes	3
	1.3 About this translated version	4
2	Product information	5
	2.1 Intended use	5
	2.1.1 Areas of application	5
	2.2 Product description	5
	2.2.1 Overview	5
3	Handling	6
	3.1 Assembly	6
	3.1.1 Mounting the connection set	6
	3.2 Disposal	14

1 About these instructions for use

Trade mark rights exist for this document; for further information, go to viega.com/legal.

1.1 Target groups

The information in this instruction manual is directed at the following groups of people:

- Heating and plumbing experts and trained personnel

Individuals without the abovementioned training or qualification are not permitted to mount, install and, if required, maintain this product. This restriction does not extend to possible operating instructions.

The installation of Viega products must take place in accordance with the general rules of engineering and the Viega instructions for use.

1.2 Labelling of notes

Warning and advisory texts are set aside from the remainder of the text and are labelled with the relevant pictographs.



DANGER!

This symbol warns of possible life-threatening injury.



WARNING!

This symbol warns of possible serious injury.



CAUTION!

This symbol warns of possible injury.



NOTICE!

This symbol warns of possible damage to property.



This symbol gives additional information and hints.

1.3 About this translated version

This instruction for use contains important information about the choice of product or system, assembly and commissioning as well as intended use and, if required, maintenance measures. The information about the products, their properties and application technology are based on the current standards in Europe (e.g. EN) and/or in Germany (e.g. DIN/DVGW).

Some passages in the text may refer to technical codes in Europe/Germany. These should serve as recommendations in the absence of corresponding national regulations. The relevant national laws, standards, regulations, directives and other technical provisions take priority over the German/European directives specified in this manual: The information herein is not binding for other countries and regions; as said above, they should be understood as a recommendation.

2 Product information

2.1 Intended use

2.1.1 Areas of application

The connection set is used to connect a wall-hung shower WC to the concealed cisterns 3H and 3L. Only suitable for WC elements with WC connection box.

2.2 Product description

2.2.1 Overview

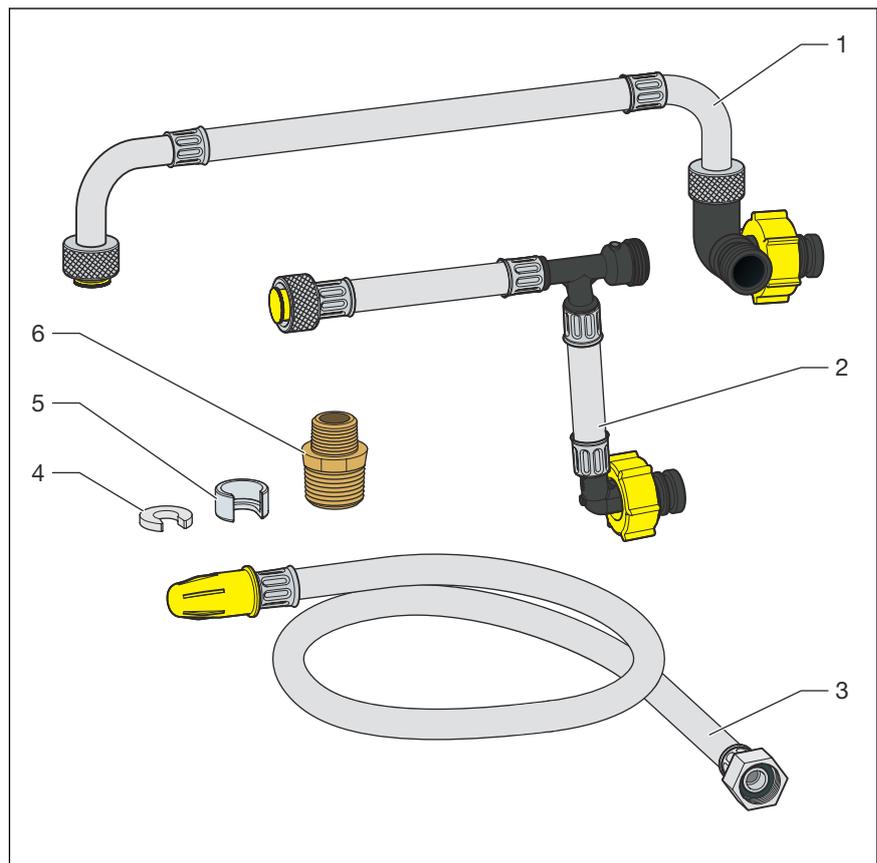


Fig. 1: Components


- 1 Connection T-piece article number 827618
- 2 Connection T-piece article number 827601
- 3 Armoured hose
- 4 Fixing material
- 5 Fixing material
- 6 Reducing coupling

3 Handling


3.1 Assembly

3.1.1 Mounting the connection set


3H cistern

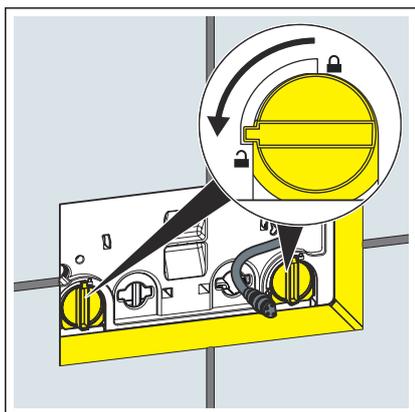


- Turn the site protection panel lock 90° anti-clockwise.

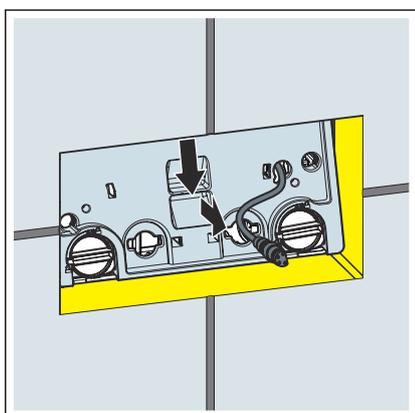


- Remove the site protection panel.

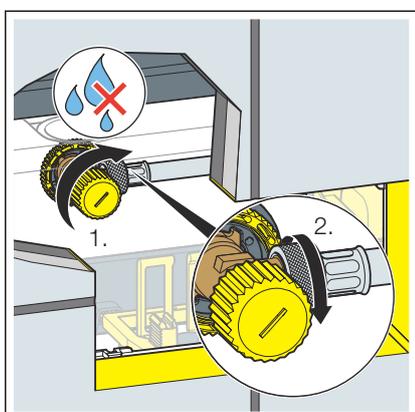


- Close the corner valve.
- Loosen the flexible hose from the corner valve.

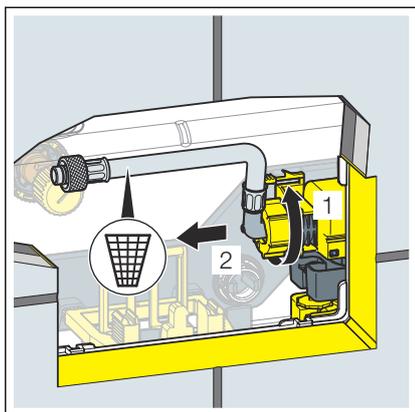


Loosen the flexible hose on the filling valve.

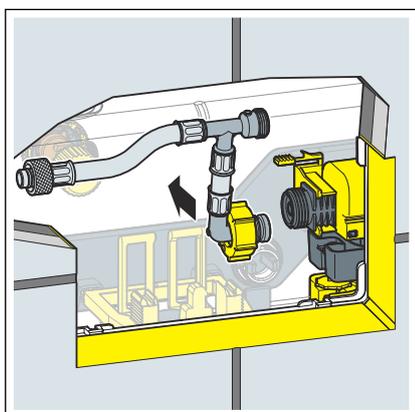


Insert the flexible hose.

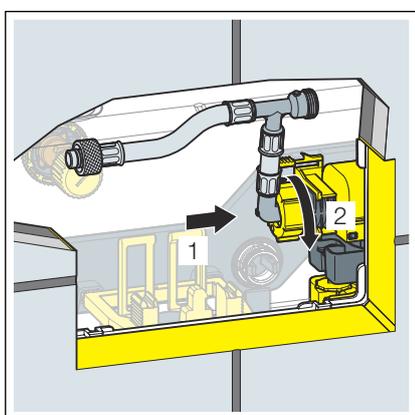


Screw the flexible hose to the filling valve.

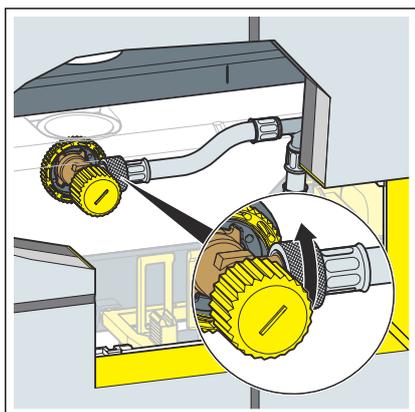


Screw the flexible hose and the corner valve to each other.

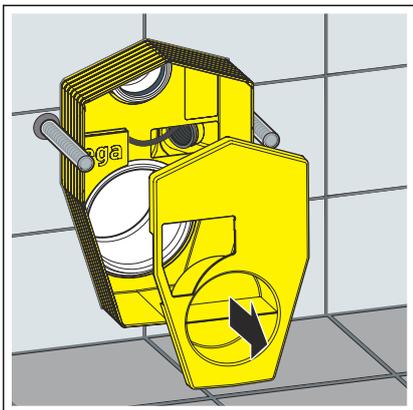


➤ Remove the cover of the WC connection box.

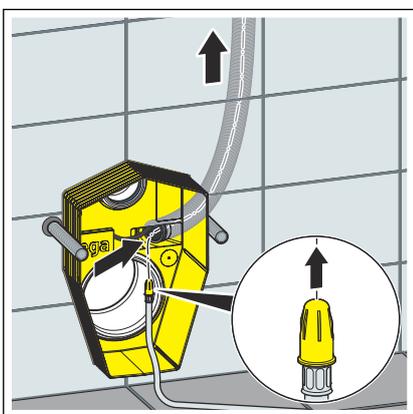


➤ Guide the armored hose upwards through the empty pipe into the cistern.

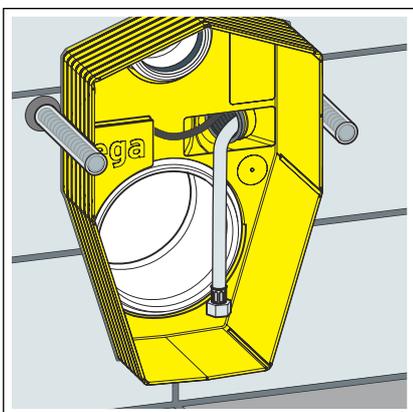


➤ The shower toilet is prepared on the water side.

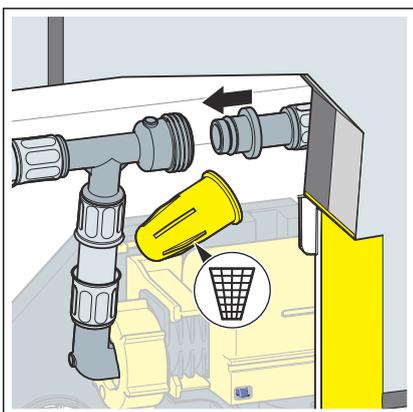


➤ Remove the cap, and dispose of it.

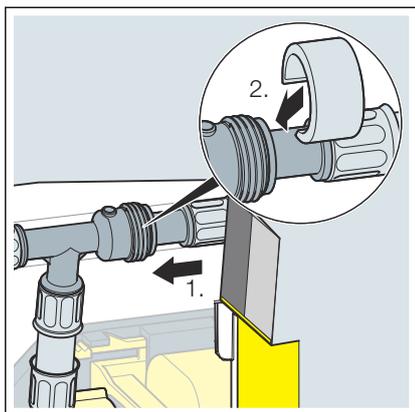


► Fit the union nut.

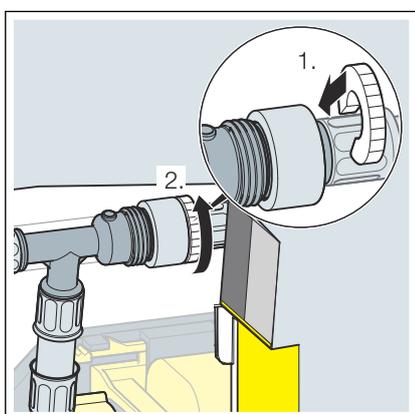


► Fit the lock washer.

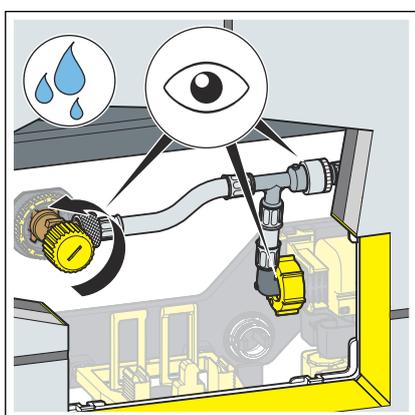

► Check the water-side installation for leak-tightness.

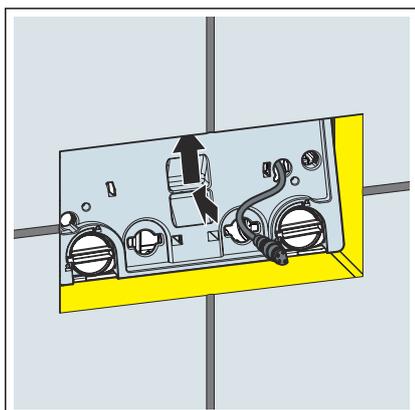


► Insert the site protection panel into the cistern.

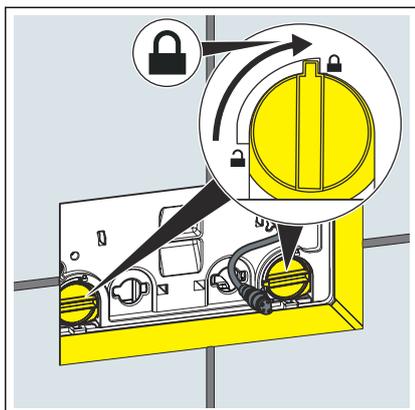


► Turn the site protection panel's lock by 90° clockwise.


Concealed cistern 3L

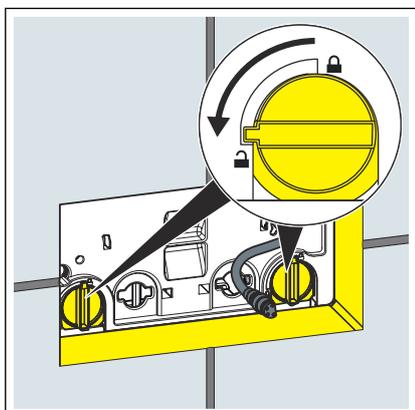


► Turn the site protection panel lock 90° anti-clockwise.

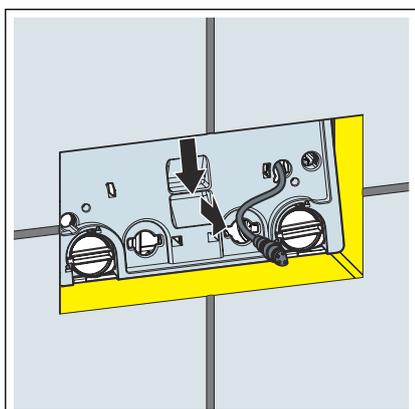


► Remove the site protection panel.

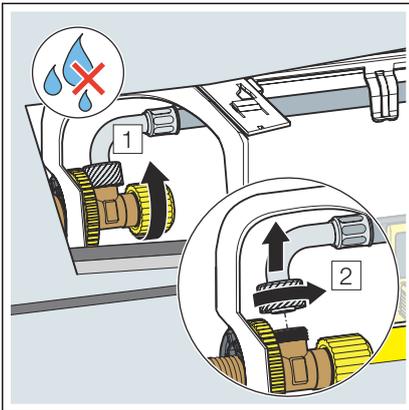


- Close the corner valve.
- Loosen the flexible hose from the corner valve.

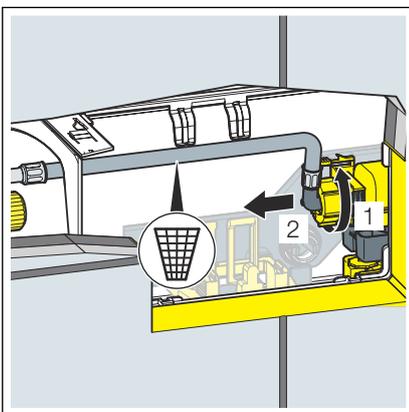


- Loosen the flexible hose on the filling valve.

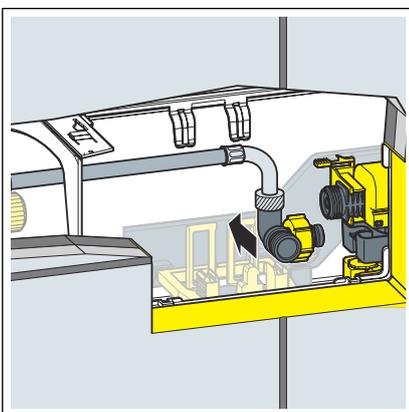


- Insert the flexible hose.

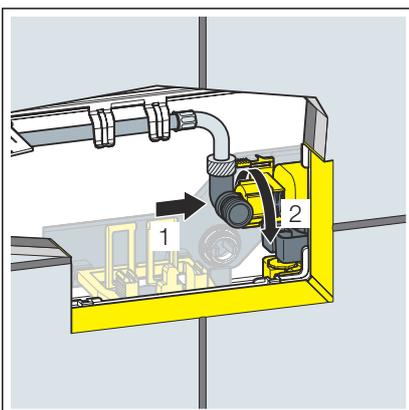


- Screw the flexible hose to the filling valve.

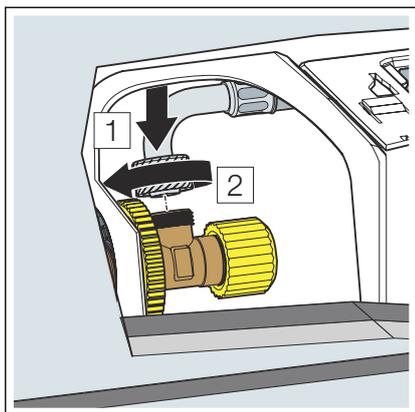

► Screw the flexible hose and the corner valve to each other.

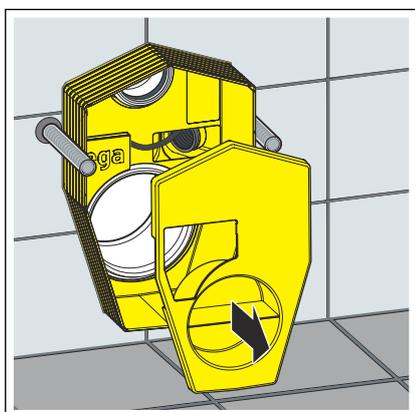


► Remove the cover of the WC connection box.

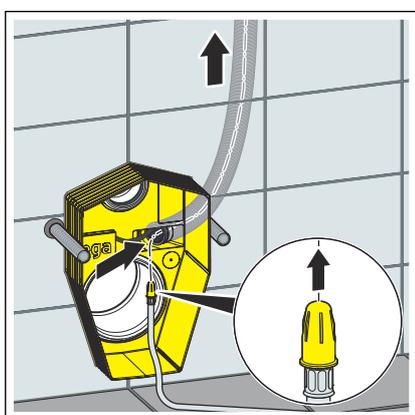


► Guide the armoured hose upwards through the empty pipe into the cistern.




► The shower toilet is prepared on the water side.

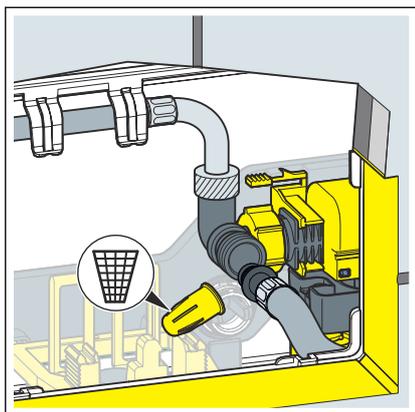


➤ Remove the cap, and dispose of it.

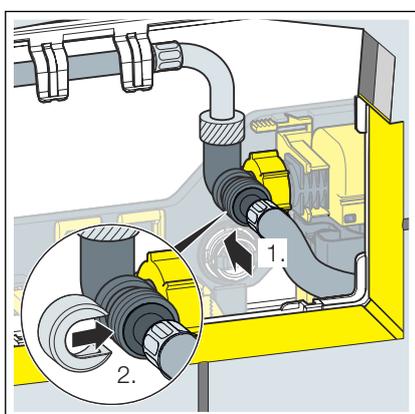


➤ Fit the union nut.

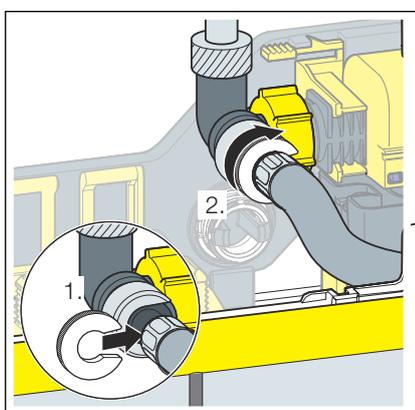


➤ Fit the lock washer.

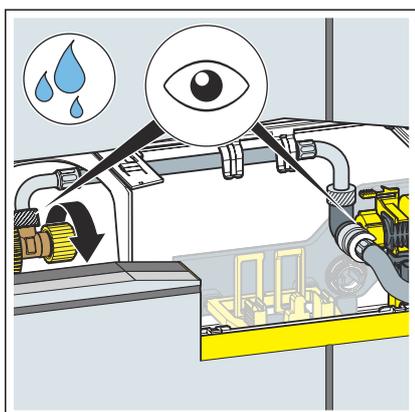

➤ Check the water-side installation for leak-tightness.

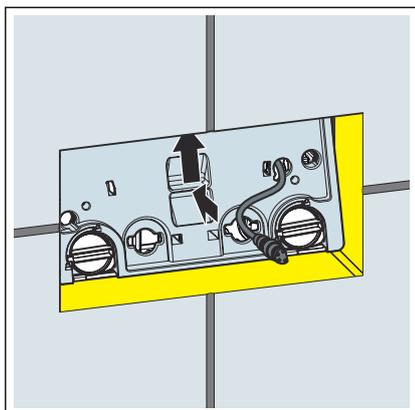

► Insert the site protection panel into the cistern.

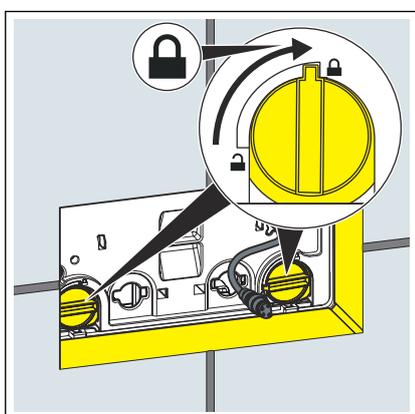

► Turn the site protection panel's lock by 90° clockwise.

3.2 Disposal

Separate the product and packaging materials (e. g. paper, metal, plastic or non-ferrous metals) and dispose of in accordance with valid national legal requirements.



Viega GmbH & Co. KG
service-technik@viega.de
viega.com

INT • 2024-07 • VPN230126

