

## Flush plate Visign for Style 12

### Instructions for Use



for concealed cistern 2H, concealed cistern 2L, concealed cistern 2C

**Model**  
8332.4

**Year built:**  
from 07/2009

en\_INT

**viega**



# Table of contents

<b>1</b>	<b>About these instructions for use</b>	<b>4</b>
1.1	Target groups	4
1.2	Labelling of notes	4
1.3	About this translated version	5
<b>2</b>	<b>Product information</b>	<b>6</b>
2.1	Intended use	6
2.1.1	Areas of use	6
2.2	Product description	7
2.2.1	Overview	7
2.2.2	Technical data	7
<b>3</b>	<b>Handling</b>	<b>8</b>
3.1	Assembly information	8
3.1.1	Required material and tools	8
3.2	Assembly	8
3.2.1	Mounting tile-level installation frame	8
3.2.2	Mounting the flush plate	10
3.3	Commissioning	12
3.3.1	Setting the flush	12
3.4	Error, faults and remedy	12
3.5	Care and maintenance	12
3.5.1	Maintenance tips	12
3.6	Disposal	13

# 1 About these instructions for use

Trade mark rights exist for this document, further information can be found at [www.viega.com/legal-notice](http://www.viega.com/legal-notice).

## 1.1 Target groups

The information in this instruction manual is directed at the following groups of people:

- Heating and sanitary professionals and trained personnel
- Consumers

It is not permitted for individuals without the abovementioned training or qualification to mount, install and, if required, service this product. This restriction does not extend to possible operating instructions.

The installation of Viega products must take place in accordance with the general rules of engineering and the Viega instructions for use.

## 1.2 Labelling of notes

Warning and advisory texts are set aside from the remainder of the text and are labelled with the relevant pictographs.

**DANGER!**

This symbol warns against possible life-threatening injury.

**WARNING!**

This symbol warns against possible serious injury.

**CAUTION!**

This symbol warns against possible injury.

**NOTICE!**

This symbol warns against possible damage to property.



*Notes give you additional helpful tips.*

### 1.3 About this translated version

This instruction for use contains important information about the choice of product or system, assembly and commissioning as well as intended use and, if required, maintenance measures. The information about the products, their properties and application technology are based on the current standards in Europe (e. g. EN) and/or in Germany (e. g. DIN/DVGW).

Some passages in the text may refer to technical codes in Europe/Germany. These should serve as recommendations in the absence of corresponding national regulations. The pertinent national laws, standards, regulations and guidelines, as well as other technical guidelines, have priority over German/European guidelines in this manual: The information is not binding for other countries and territories and should, as mentioned, be considered as support.

## 2 Product information

### 2.1 Intended use

#### 2.1.1 Areas of use

##### Suitable cisterns

The flush plate is intended for the actuation of flushes on Viega concealed cisterns.

The tile-level installation frame can only be used in dry construction.


Installation is only possible in the following Viega concealed cisterns:

- Cistern model 2H
- Cistern model 2L

Ascertain which model is installed before mounting. The following information will help you to determine the model of the cistern installed:


##### Cistern 2H

The revision shaft of this cistern is found at a height of approx. 1 metre on the front.

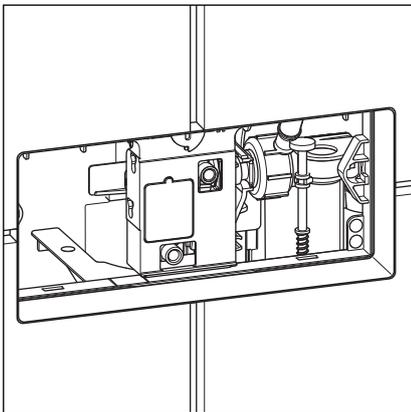

##### Cistern 2L

The revision shaft of this cistern is either found at a height of approx. 75 cm on the front or on the top.

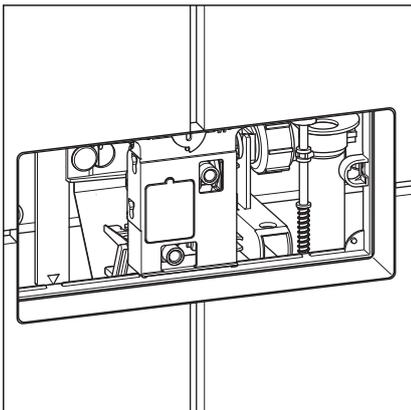

## 2.2 Product description

### 2.2.1 Overview

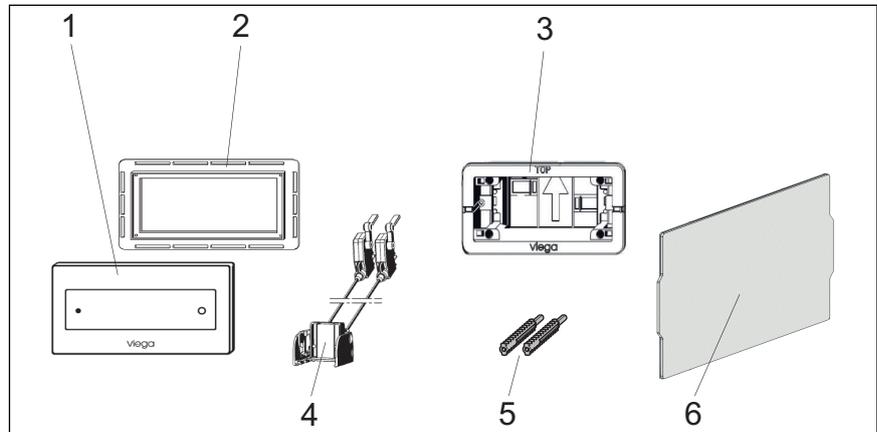


Fig. 1: Component overview

- 1 - flush plate
- 2 - tile-level installation frame
- 3 - basic panel
- 4 - Bowden cable unit
- 5 - threaded bolt
- 6 - cover plate

### 2.2.2 Technical data

The product exhibits the following technical data:

#### Flush volume

The flush volume for the flushes are:

- Small flush volume: approx. 3–4 litres
- Large flush volume: approx. 6–9 litres

For the setting of the flush see [Chapter 3.3.1 „Setting the flush“](#) on page 12.

# 3 Handling

## 3.1 Assembly information

### 3.1.1 Required material and tools

#### Tool

The following tools are required for mounting:


- flat screwdriver
- knife (cutter)
- jigsaw

## 3.2 Assembly


### 3.2.1 Mounting tile-level installation frame


Requirements:

- The cistern is fitted into the front wall.
- Cut into shaft cover.

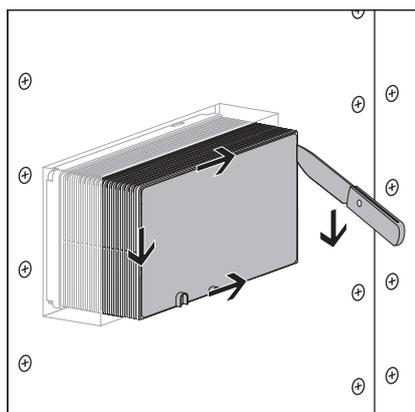


- Remove shaft cover.

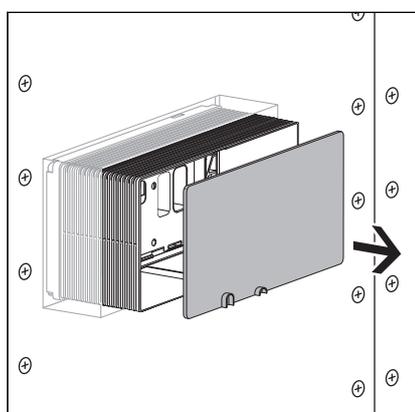


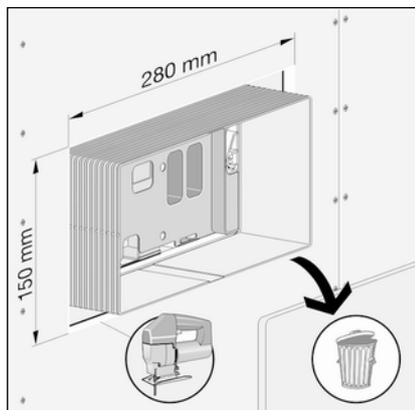

- Mark the internal contour (280 x 150 mm) of the installation frame onto the cladding panel and then cut it out using a keyhole saw.

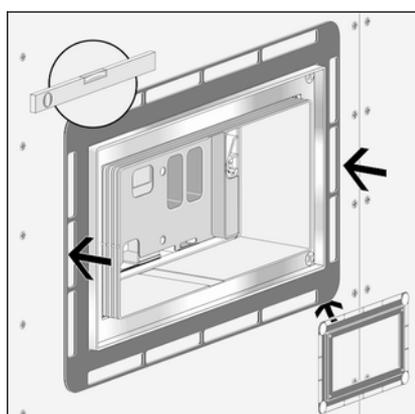


- Align installation frame centrally on the revision shaft and affix using the double-sided adhesive tape on the rearside.

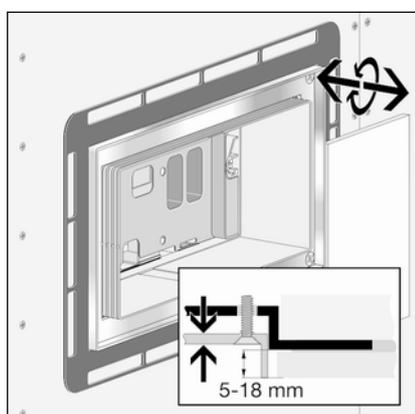

- Place installation frame onto the relevant wall tile using the adjusting screws.


Setting range: 5–18 mm

**INFO!** The upper edge of the internal frame must be flush with the wall tile. Make allowance for the thickness of the tile adhesive.

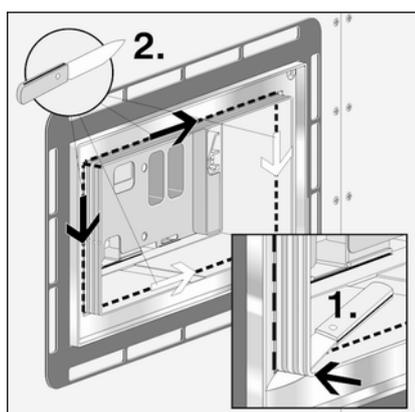


- Shorten revision shaft flush with the internal frame:

First of all, cut into the corners of the revision shaft and then fold the sides in.

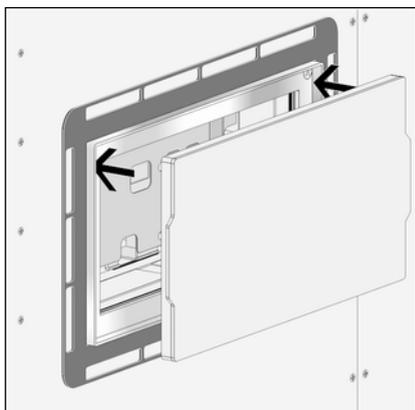

- Mount the cover supplied onto the internal frame.

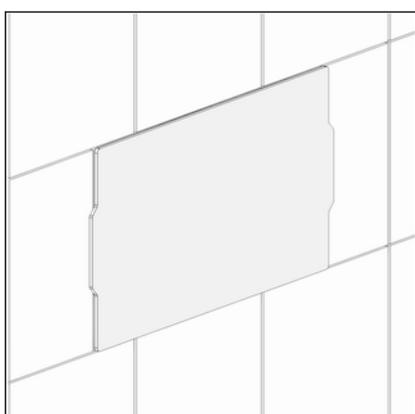


- Tile pre-wall.


- Remove the cover again.
  - ⇒ The WC flush plate can be mounted.

### 3.2.2 Mounting the flush plate


Requirements:

- the tile-level installation frame has been mounted
- the wall is tiled
- Remove cistern cover.
- Remove and keep the threaded bolts from the cistern cover.
- Dispose of cistern cover.

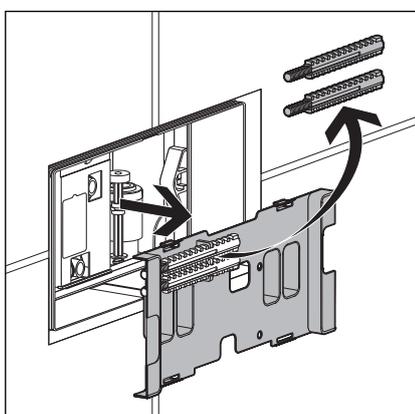


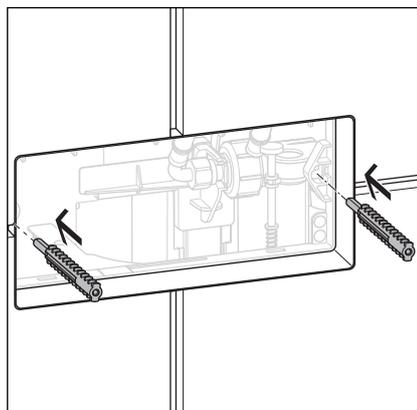


- Insert the threaded bolts left and right into the holders.  
The threaded anchors must be positioned to the top and bottom.

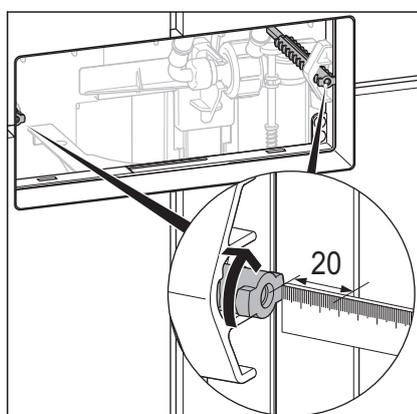


- Insert the threaded bolts so deeply that the upper edge of the threaded bolt sticks out approx. 20 mm behind the upper edge of the tiles.
- Fasten threaded bolts with a 90° turn.

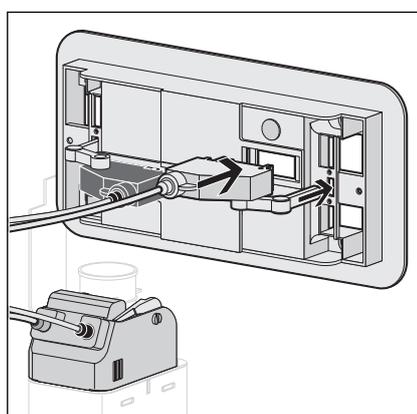

- Mount Bowden cable unit onto the rear side of the basic panel.  
**INFO! Observe the colour of the adapter!**

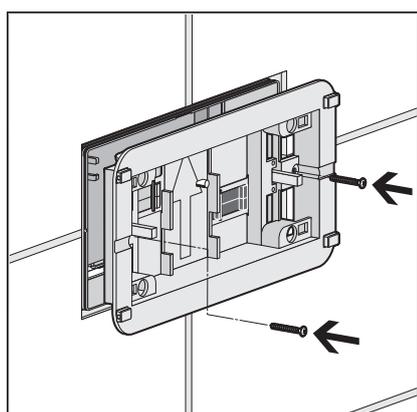


- Screw on basic panel.

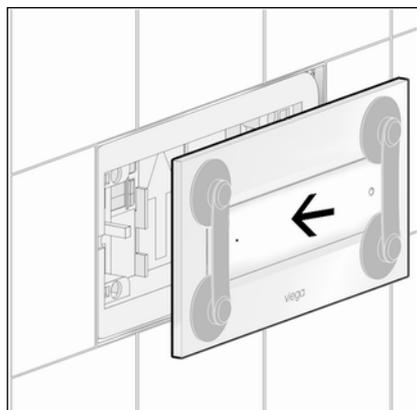

► Mount flush plate.

### 3.3 Commissioning

#### 3.3.1 Setting the flush

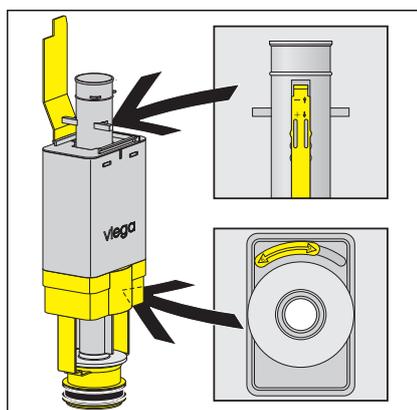

► Set the flush volume on the drain valve of the cistern.

Small flush volume (above): approx. 3–4 litres

Large flush volume (below): approx. 6–9 litres

### 3.4 Error, faults and remedy

Error	Cause	Remedy
WC does not flush	Cistern is not yet completely full	Wait until the cistern is sufficiently full
	No water in cistern, corner valve is closed	Open corner valve
WC flush runs through	Dirty seal in filling valve	Check seal, replace if necessary
	Dirty seal in drain valve	Check seal, replace if necessary
WC flush actuation does not work	Bowden cable unit not properly mounted on drain valve or basic panel.	Check the position of the Bowden cable unit.

### 3.5 Care and maintenance

#### 3.5.1 Maintenance tips

Normal soap or a mild cleaning agent can be used for regular care and prevention of lime scale on the flush plate. Under no circumstances should scouring agent or scratching objects be used.

Strong stains can be removed using typical household cleaner. Rinse the detergent thoroughly with clear water after the prescribed exposure time. There should be no residue on the components.

### **3.6 Disposal**

Separate the product and packaging materials (e. g. paper, metal, plastic or non-ferrous metals) and dispose of in accordance with valid national legal requirements.