


Advantix eccentric panel

Instructions for Use

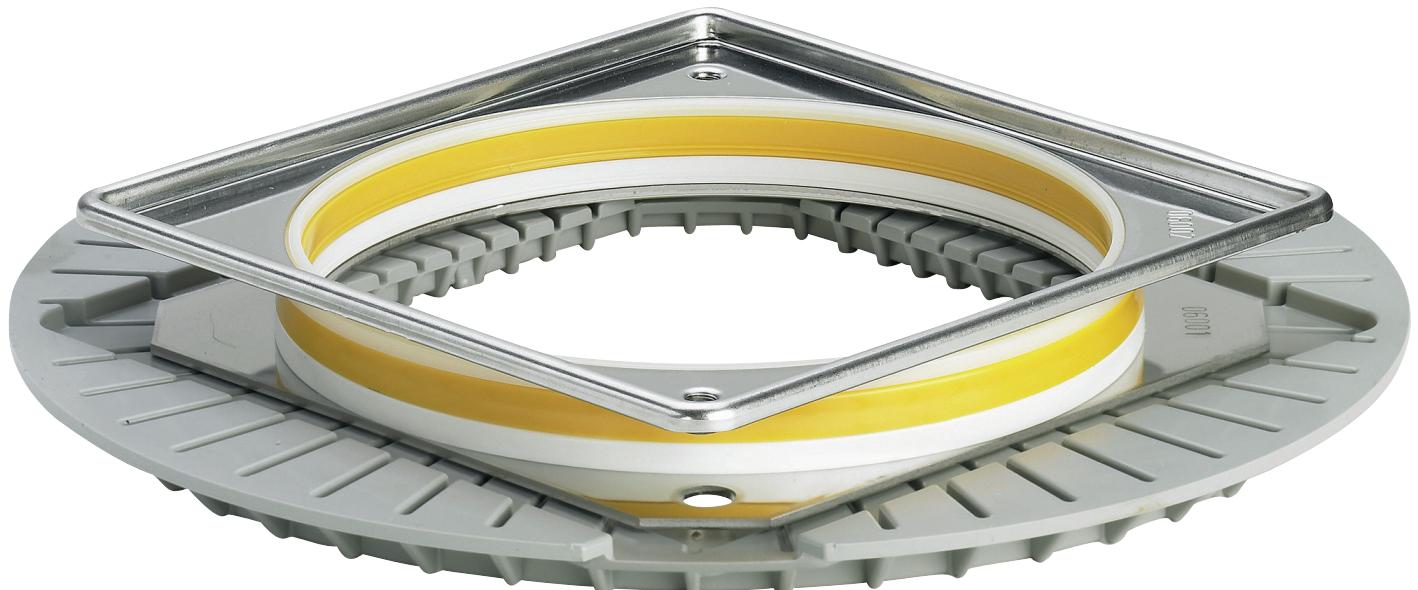

Model
4954.9

Year built:
from 01/2006

en_INT

viega

Table of contents

1	About these instructions for use	4
1.1	Target groups	4
1.2	Labelling of notes	4
1.3	About this translated version	5
2	Product information	6
2.1	Intended use	6
2.1.1	Areas of use	6
2.2	Product description	6
2.2.1	Overview	6
3	Handling	7
3.1	Assembly	7
3.1.1	Mounting eccentric adjuster	7
3.2	Disposal	9

1 About these instructions for use

Trade mark rights exist for this document, further information can be found at www.viega.com/legal-notices.

1.1 Target groups

The information in this instruction manual is directed at the following groups of people:

- Heating and sanitary professionals and trained personnel

It is not permitted for individuals without the abovementioned training or qualification to mount, install and, if required, service this product. This restriction does not extend to possible operating instructions.

The installation of Viega products must take place in accordance with the general rules of engineering and the Viega instructions for use.

1.2 Labelling of notes

Warning and advisory texts are set aside from the remainder of the text and are labelled with the relevant pictographs.

	DANGER! This symbol warns against possible life-threatening injury.
	WARNING! This symbol warns against possible serious injury.
	CAUTION! This symbol warns against possible injury.
	NOTICE! This symbol warns against possible damage to property.
	<i>Notes give you additional helpful tips.</i>

1.3 About this translated version

This instruction for use contains important information about the choice of product or system, assembly and commissioning as well as intended use and, if required, maintenance measures. The information about the products, their properties and application technology are based on the current standards in Europe (e. g. EN) and/or in Germany (e. g. DIN/DVGW).

Some passages in the text may refer to technical codes in Europe/Germany. These should serve as recommendations in the absence of corresponding national regulations. The pertinent national laws, standards, regulations and guidelines, as well as other technical guidelines, have priority over German/European guidelines in this manual: The information is not binding for other countries and territories and should, as mentioned, be considered as support.

2 Product information

2.1 Intended use

2.1.1 Areas of use

The eccentric positioning makes subsequent adjustment of the grate position possible by up to 15 mm radial and 4.5 to 19.5 mm vertically.

Installation must be carried out by a specialist company in accordance with construction regulations and the product information of the flat sealing system being used.

2.2 Product description

2.2.1 Overview

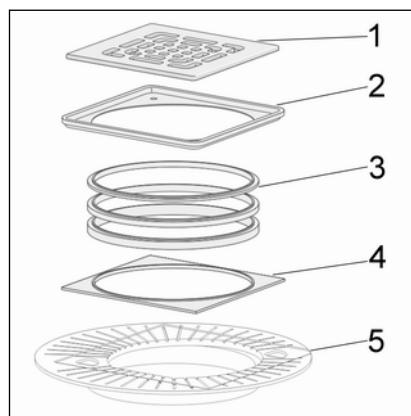



Fig. 1: Components

- 1 - grate
- 2 - stainless steel frame
- 3 - spacer rings
- 4 - spacer ring seat
- 5 - eccentric adjuster


3 Handling

3.1 Assembly


3.1.1 Mounting eccentric adjuster

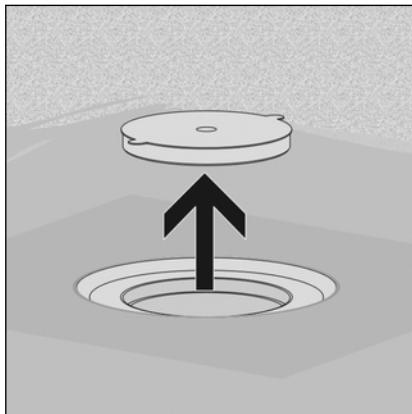

► Remove yellow protective plug.

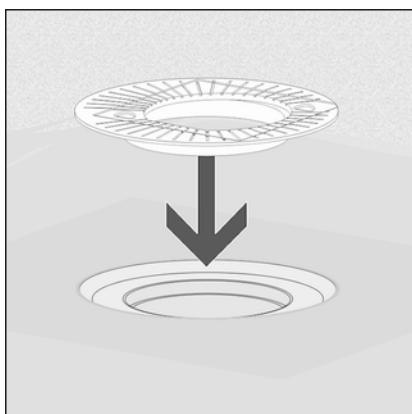


► Insert eccentric adjuster.

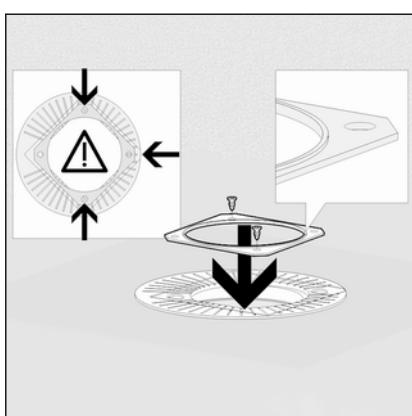


► Insert distance ring seat with the internal edge facing upwards.

► Screw spacer ring seat together.

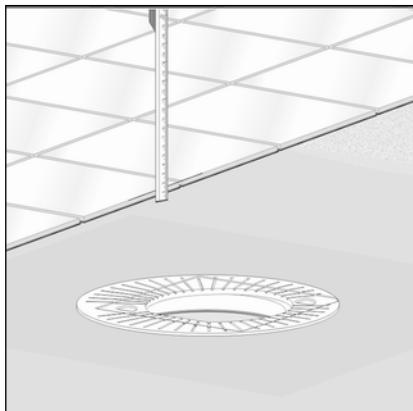


► Calculate the height of the floor construction from the edge in the inside of the stacking element up to the upper edge of the tiles.

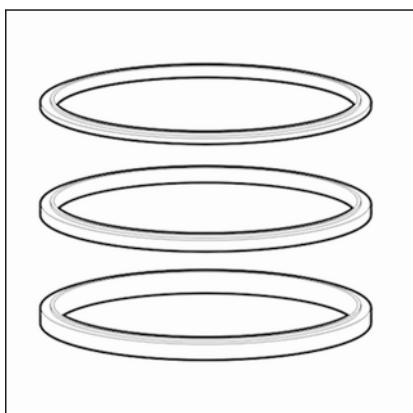

► Select spacer rings.


Height up to upper edge of tiles [mm]	spacer rings to be inserted
4.5	only spacer ring seat
7.5	3 (beige)
9.5	5 (white)
11.5	7 (yellow)
12.5	3 + 5
14.5	3 + 7
16.5	5 + 7
19.5	3 + 5 + 7

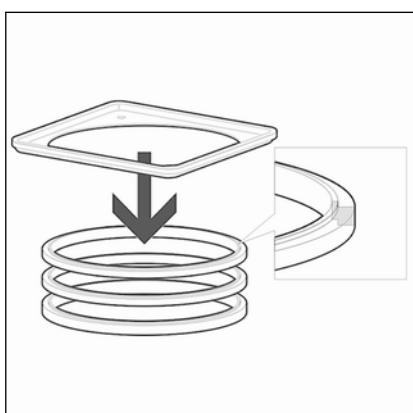


NOTICE! If spacer rings are used, the stainless steel frame must be placed in the tile adhesive to maintain the strength and stability.

► Plug stainless steel frame and spacer rings together.


The raised side faces upwards and the hollow side downwards.

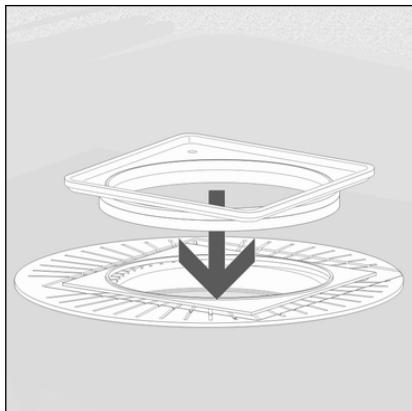

- ▶ Place the stainless steel frame and the spacer ring(s) into the eccentric insert (adjusting range up to 15 mm to each side).

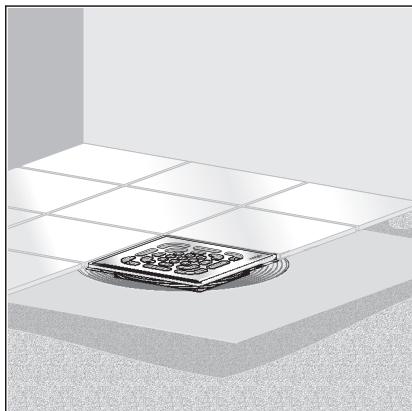

- ▶ Insert grate.
- ▶ Lay tiles.

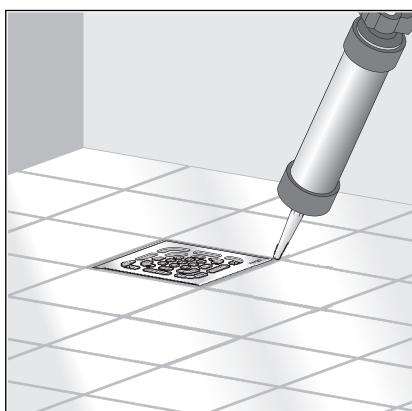

- ▶ Close gap between stainless steel frame and tiles with silicone.

3.2 Disposal

Separate the product and packaging materials (e. g. paper, metal, plastic or non-ferrous metals) and dispose of in accordance with valid national legal requirements.