

Viega Eco Plus fixing set

Instructions for Use



for fixing of the Viega Eco Plus/Viega Eco elements

Model
8173

Year built:
from 11/2002

en_INT

viega

Table of contents

1	About these instructions for use	4
1.1	Target groups	4
1.2	Labelling of notes	4
1.3	About this translated version	5
2	Product information	6
2.1	Intended use	6
2.1.1	Areas of use	6
2.2	Product description	6
2.2.1	Overview	6
3	Handling	7
3.1	Assembly information	7
3.1.1	Required tools	7
3.2	Assembly	8
3.2.1	Single/Line mounting	8
3.2.2	Corner mounting	11
3.3	Disposal	13

1 About these instructions for use

Trade mark rights exist for this document, further information can be found at www.viega.com/legal-notice.

1.1 Target groups

The information in this instruction manual is directed at the following groups of people:

- Heating and sanitary professionals and trained personnel

It is not permitted for individuals without the abovementioned training or qualification to mount, install and, if required, service this product. This restriction does not extend to possible operating instructions.

The installation of Viega products must take place in accordance with the general rules of engineering and the Viega instructions for use.

1.2 Labelling of notes

Warning and advisory texts are set aside from the remainder of the text and are labelled with the relevant pictographs.



DANGER!

This symbol warns against possible life-threatening injury.



WARNING!

This symbol warns against possible serious injury.



CAUTION!

This symbol warns against possible injury.



NOTICE!

This symbol warns against possible damage to property.



Notes give you additional helpful tips.

1.3 About this translated version

This instruction for use contains important information about the choice of product or system, assembly and commissioning as well as intended use and, if required, maintenance measures. The information about the products, their properties and application technology are based on the current standards in Europe (e. g. EN) and/or in Germany (e. g. DIN/DVGW).

Some passages in the text may refer to technical codes in Europe/Germany. These should serve as recommendations in the absence of corresponding national regulations. The pertinent national laws, standards, regulations and guidelines, as well as other technical guidelines, have priority over German/European guidelines in this manual: The information is not binding for other countries and territories and should, as mentioned, be considered as support.

2 Product information

2.1 Intended use

2.1.1 Areas of use

The fixing set is intended for fixing Viega Eco Plus- / Viega Eco elements (in single / serial mounting, single mounting directly onto the installation body or corner mounting on masonry or metal support profile).

Suitable mounting rails

■ Model 8001

2.2 Product description

2.2.1 Overview

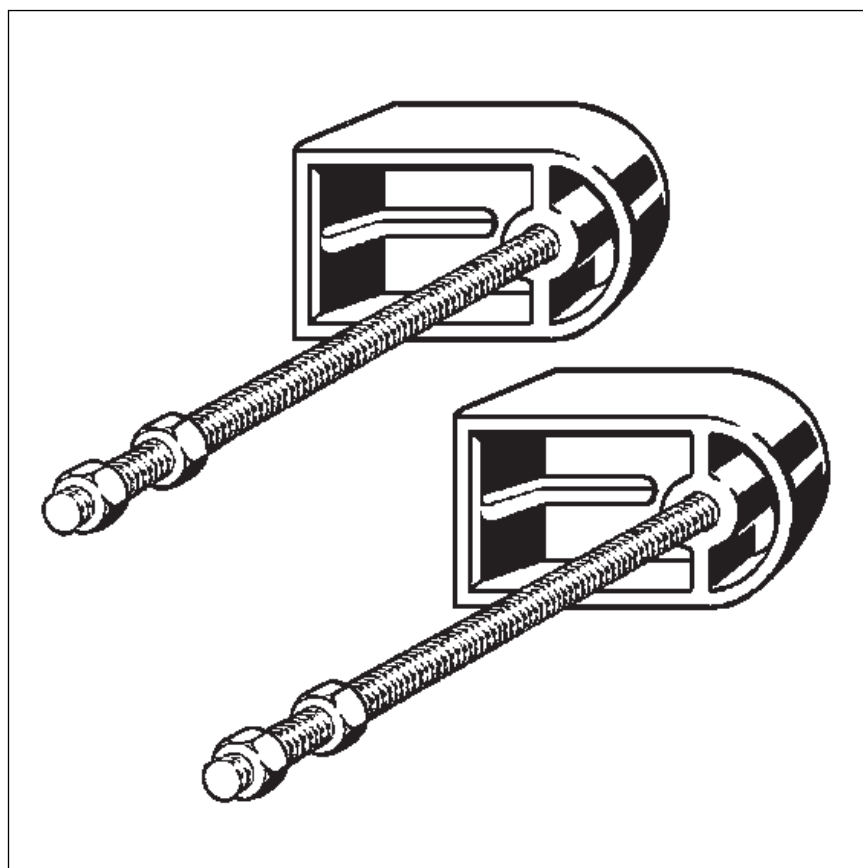


Fig. 1: Component overview

3 Handling

3.1 Assembly information

3.1.1 Required tools


The following tools are required for mounting:

- drill with 10 mm drill bit
- fork or ring spanner: 13 mm / 17 mm

3.2 Assembly


3.2.1 Single/Line mounting

Mounting on the wall

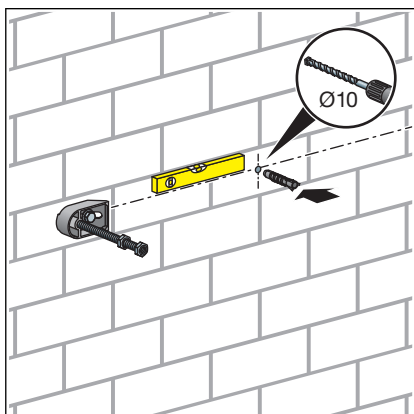


► Determine and mark fixing points.

► Drill holes and insert dowels.

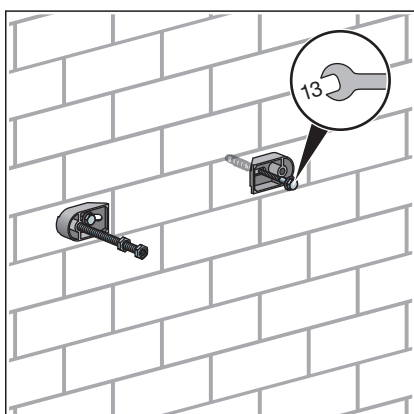


► Screw the fixing set into the wall with the fork spanner (SW 13).

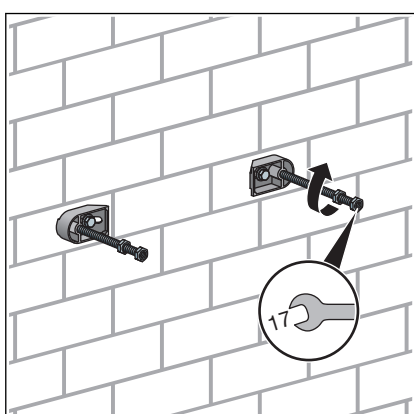


► Screw threaded rods into fixing set (SW 17).


Mounting on the mounting rail (model 8001)

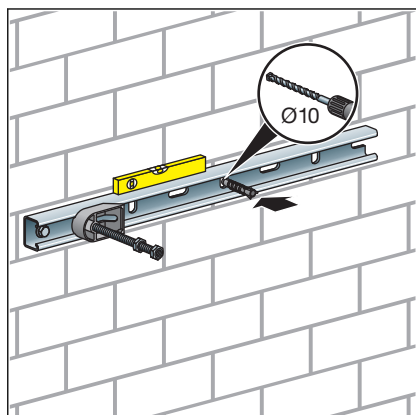


- Determine and mark fixing points for the mounting rail.
- Drill holes and insert dowels.

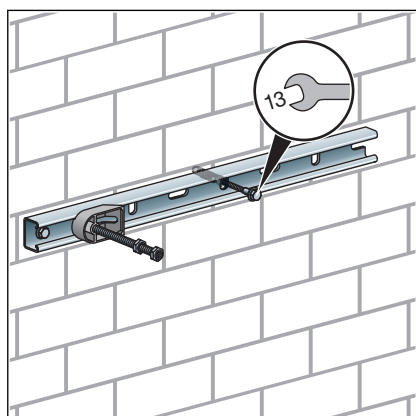

- Screw the mounting rail into the wall with the fork spanner (SW 13).

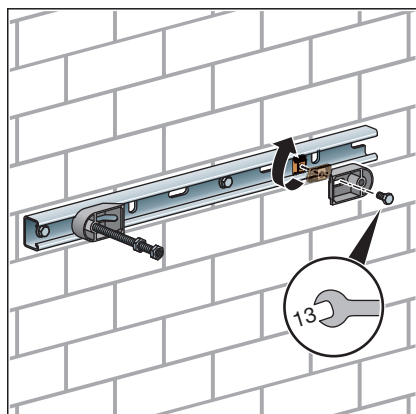


- Fit slot nuts into the mounting rail and turn by 90°.
- Screw the fixing set together with slot nuts (SW 13).

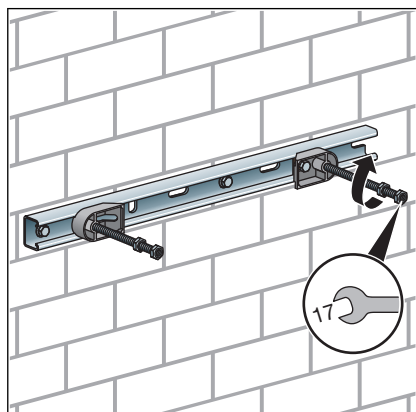

► Screw threaded rods into fixing set (SW 17).


3.2.2 Corner mounting

Mounting on the wall

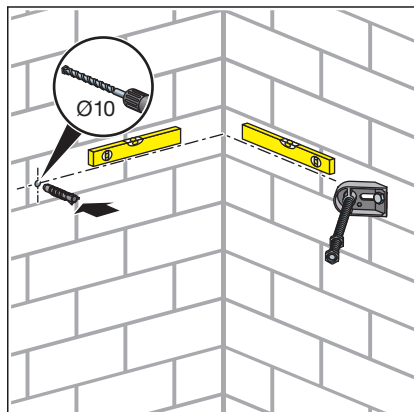


► Determine and mark fixing points.

► Drill holes and insert dowels.

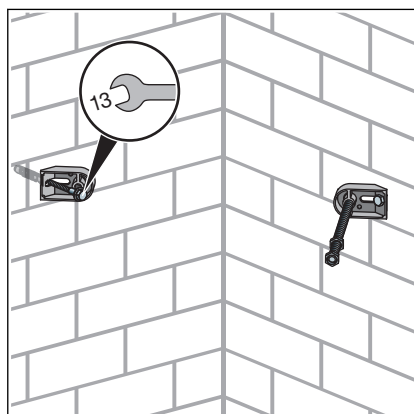


► Screw the fixing set into the wall with the fork spanner (SW 13).

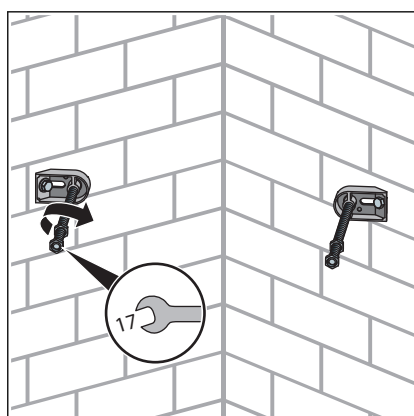


► Screw threaded rods into fixing set (SW 17).


Mounting on the mounting rail (model 8001)

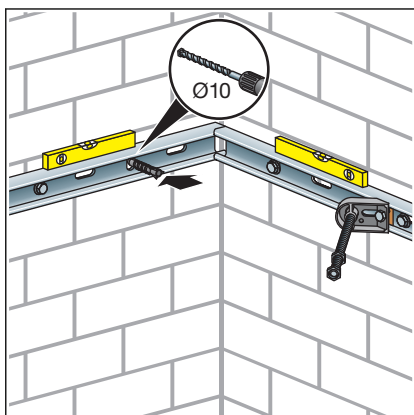


- Determine and mark fixing points for the mounting rail.
- Drill holes and insert dowels.

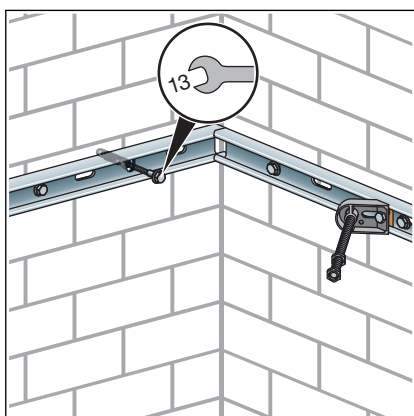

- Screw the mounting rail into the wall with the fork spanner (SW 13).

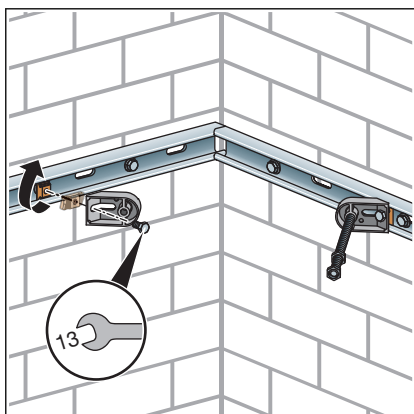

- Fit slot nuts into the mounting rail and turn by 90°.
- Screw the fixing set together with slot nuts (SW 13).

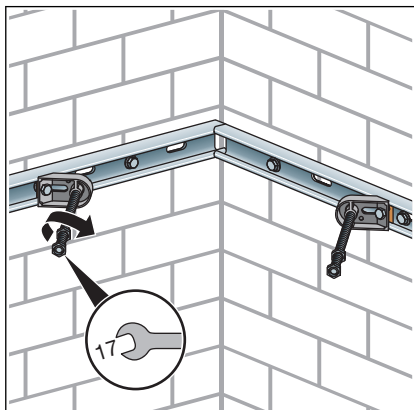

► Screw threaded rods into fixing set (SW 17).

3.3 Disposal

Separate the product and packaging materials (e. g. paper, metal, plastic or non-ferrous metals) and dispose of in accordance with valid national legal requirements.